


High Speed Spreader

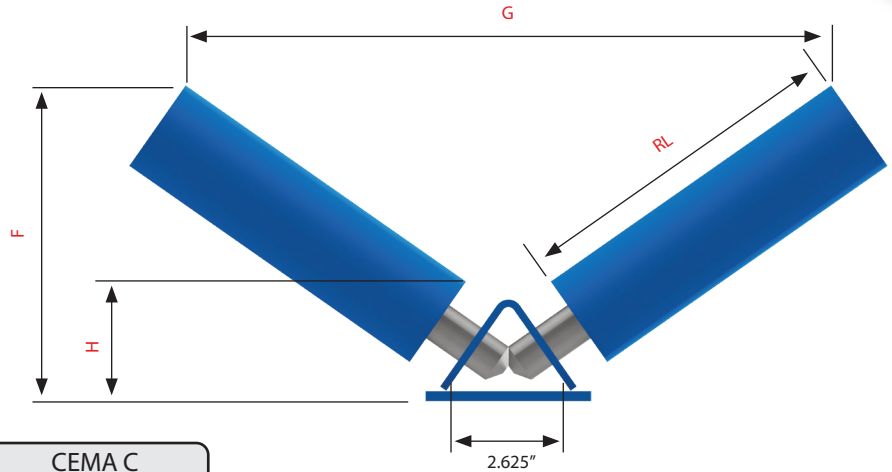

2.375-INCH DIAMETER

BELT	F	G	H	RL
8"	5.875"	8.875"	2.562"	4.750"
10"	5.688"	10.4375"	2.562"	5.750"
12"	6.4375"	12.063"	2.562"	6.750"
14"	7"	13.750"	2.562"	7.750"
16"	7.562"	15.375"	2.562"	8.750"
18"	8.125"	17"	2.562"	9.750"

CEMA C

PART #	WEIGHT
8C-235-SS	18 lbs.
10C-235-SS	19 lbs.
12C-235-SS	20 lbs.
14C-235-SS	21 lbs.
16C-235-SS	22 lbs.
18C-235-SS	23 lbs.

Engineered for High-Speed Applications: Designed specifically for fast-moving belt systems like portable stone slingers, the HSS delivers smooth, stable conveying performance under extreme conditions.

True Shaft Concentricity: Eliminates wobble and belt sway often caused by high belt speeds, ensuring a precise, vibration-free operation.

Mechanical Cap Attachment: Durable outer cap is mechanically fastened to prevent failures or separation during operation, no blowouts, even at top speeds.

Custom Sizes Available: Offered in a wide range of sizes with custom engineering options to meet unique application requirements.

**CENTER MOUNT V-TROUGH
ALSO AVAILABLE**

