


Richwood Redi-Lagg

Premium Weld-On Lagging for Demanding Applications

Luff Industries proudly offers Richwood Redi-Lagg®, a premium lagging solution engineered for performance, durability, and value. Whether you're operating in harsh industrial environments or looking to optimize conveyor systems, Redi-Lagg delivers measurable results.

Key Benefits

- » Improved Traction
- » Extended Pulley Life
- » Exceptional Abrasion Resistance
- » Reduced Maintenance Costs

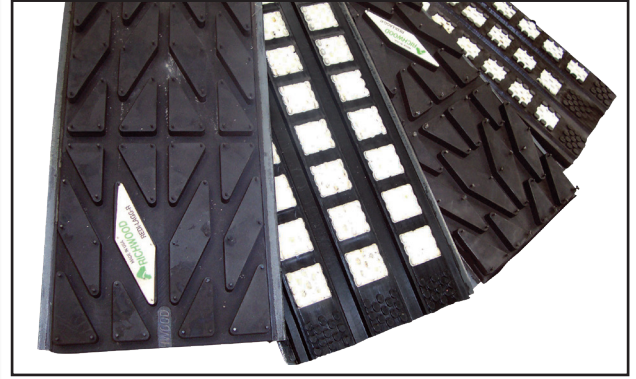

Richwood Redi-Lagg - Number of 72" pads required

	Pulley Face Width																			
Pulley Diameter	12	14	16	18	20	22	24	26	30	32	36	38	40	44	46	51	54	60	66	72
10.5	1	1	2	2	2	2	2	2	3	3	3	3	3	4	4	4	4	5	5	5
12.5	1	2	2	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	6	6
14	2	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	6	6	7	7
16	2	2	2	2	3	3	3	3	4	4	4	5	5	5	6	6	6	7	8	8
18	2	2	2	3	3	3	3	4	4	4	5	5	5	6	6	7	7	8	9	9
20	2	2	3	3	3	4	4	4	5	5	5	6	6	7	7	8	8	9	10	10
24	2	3	3	3	4	4	4	5	5	6	6	7	7	8	8	9	9	10	11	12
30	3	3	4	4	5	5	5	6	7	7	8	8	9	10	10	11	12	13	14	15
36	3	4	4	5	5	6	6	7	8	8	9	10	10	12	12	13	14	15	17	18
42	4	5	5	6	6	7	7	8	9	10	11	12	12	13	14	15	16	18	20	21
48	4	5	6	6	7	8	8	9	10	11	12	13	14	15	16	17	18	20	22	24
54	5	6	6	7	8	9	9	10	12	12	14	15	15	17	18	20	21	23	25	27
60	5	6	7	8	9	10	10	11	13	14	15	16	17	19	20	22	23	25	28	30
72	6	7	8	9	10	11	12	13	15	16	18	19	20	22	23	26	27	30	33	36

Available Options:

- » Rubber or Ceramic
- » Lengths up to 72 inches
- » 1/2" and 3/4" thicknesses
- » Rubber components in standard SBR, anti-static, oil resistant and fire resistant

